


## SPECIFICATIONS

Thermodynamic Cycle	Diesel 4 stroke
Air Handling	TAA
Arrangement	6L
Bore x Stroke (mm)	13.5 X 150
Total Displacement (l)	12.88
Valves per cylinder (n°)	4
Cooling System	liquid
Direction of Rotation (viewed facing flywheel)	CCW
Compression ratio	16.5:1
Injection System	EUI

## PERFORMANCE

Rated power [*] (kW (HP) @ rpm)	325 ( 442 ) @ 2100
Peak torque (Nm (kgm) @ rpm)	2140 ( 218 ) @ 1400
High idle speed (rpm)	-
Low idle speed (rpm)	--
Minimum starting temperature without auxiliaries (°C)	-15 °
Oil and oil filter maintenance interval for replacement [***] (hours)	600

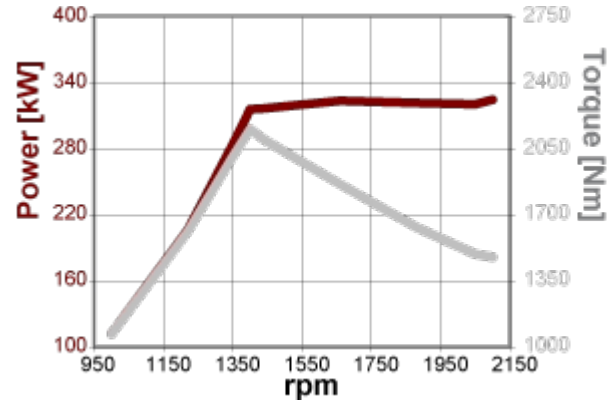

## STANDARD CONFIGURATION

Flywheel housing (type)	SAE 1 - aluminium
Flywheel size (inch)	14
Intake manifold location	middle high / right side / frontwards
Exhaust manifold location	middle high / left side / backwards
Turbocharger	fixed geometry
Turbocharger location	middle / left side
Fan transmission ratio	1.36:1
Distance between fan - crankshaft centers (mm)	X = 0 Y = 225
Fuel filter (n°)	single cartridge - right side
Fuel prefilter	included, supplied loose
Fuel Pump	high pressure pump (H.P.P.)
Oil filter (n°)	dual cartridge - left side
Oil sump	suspended sheet steel / front sump
Oil vapours blow-by circuit	close case ventilation
Oil heat exchanger	incorporated into the block
Oil filler	on valve cover
Lift pump	-
Starter	24 V - 5.5 kW
Alternator	24 V - 90 A
Engine stop device	by electronic control unit
Wiring harness	interface wiring loom with accessories
Painting color	grey

## WEIGHT AND DIMENSIONS



<b>Dry Weight</b> (standard configuration) = Kg 1040	
L =	135
W =	5
H =	865
	113
	0
	mm

## NOT INCLUDED IN STANDARD CONFIGURATION

Power Take Off (PTO)	-
PTO - transmission ratio	1.36:1
PTO - maximum available torque	SAE A 150 Nm (9 teeth ANSI B92,1) SAE B 150 Nm (13 teeth ANSI B92,1) SAE B 200 Nm (grooved DIN 5482)
Battery - minimum capacity recommended [*] (Ah)	180 Ah (24 V)
Battery - minimum cold cranking capacity recommended [*] (A)	800 A (24 V)

[\*] Power at flywheel according to 2004/26 EC (without fan), after 50 hours running, 3% tolerance, fuel Diesel EN 590.  
[\*\*] Oil type: ACEA E3 - E5.

## Legend

Arrangement	Air Handling	Turbocharger	Injection System	Emission Standard	Exhaust System
L (in line)	TAA (Turbocharged with aftercooler) TC (Turbocharged) NA (Naturally Aspirated)	WG (Wastegate) VGT (Variable Geometry Turbocharger) TST (Twin Stage Turbocharger)	M (Mechanical): ECR (Electronic Common Rail) EUI (Electronic Unit Injector)	EEV (Enhanced Environmentally friendly Vehicle)	EGR (Exhaust Gas Recirculation) SCR (Selective Catalytic Reduction)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)



FPT INDUSTRIAL OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE

[www.fptindustrial.com](http://www.fptindustrial.com)

