

SPECIFICATIONS

Thermodynamic Cycle	Diesel 4 stroke
Air Handling	TAA
Arrangement	8V
Bore x Stroke (mm)	145 X 152
Total Displacement (l)	20
Valves per cylinder (n°)	4
Cooling System	liquid
Direction of Rotation (viewed facing flywheel)	CCW
Compression ratio	16:1
Injection System	ECR

PERFORMANCE


Rated power [*] (kW (HP) @ rpm)	565 (768) @ 2100
Peak torque (Nm (kgm) @ rpm)	3200 (326) @ 1400
High idle speed (rpm)	2300
Low idle speed (rpm)	± 600

Minimum starting temperature without auxiliaries (°C)	-10 °
Oil and oil filter maintenance interval for replacement [***] (hours)	1000

STANDARD CONFIGURATION

Flywheel housing (type)	SAE 1 - cast iron
Flywheel size (inch)	14"
Intake manifold location	rear side / frontwards
Exhaust manifold location	rear side / frontwards
Turbocharger	fixed geometry
Turbocharger location	rear / both sides
Fan transmission ratio	1:1
Distance between fan - crankshaft centers (mm)	X = 0 Y = 0
Fuel filter (n°)	1, rearwards, behind the ECU
Fuel prefilter	included, supplied loose
Fuel Pump	high pressure pump (H.P.P.)
Oil filter (n°)	2, on engine frontwards
Oil sump	high slope 40 liters (max oil level)
Oil vapours blow-by circuit	rearwards
Oil heat exchanger	incorporated into the block
Oil filler	right side - outwards
Lift pump	-
Starter	24 V - 8 kW
Alternator	24 V - 90 A
Engine stop device	by electronic control unit
Wiring harness	interface wiring loom with accessories
Painting color	grey

WEIGHT AND DIMENSIONS

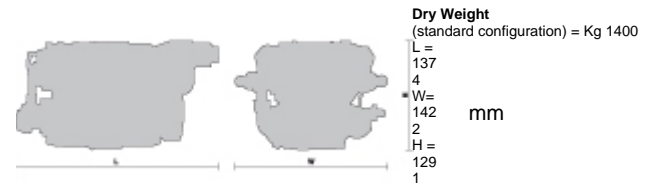

NOT INCLUDED IN STANDARD CONFIGURATION

Power Take Off (PTO)	-
PTO - transmission ratio	1.44:1
PTO - maximum available torque	SAE B Max 400 Nm
Battery - minimum capacity recommended [*] (Ah)	180 Ah (24 V)
Battery - minimum cold cranking capacity recommended [*] (A)	800 A (24 V)

[*] Power at flywheel according to 2004/26 EC (without fan), after 50 hours running, 3% tolerance, fuel Diesel EN 590.
[**] Oil type: ACEA E3 - E5.

Legend

Arrangement L (in line)	Air Handling TAA (Turbocharged with aftercooler) TC (Turbocharged) NA (Naturally Aspirated)	Turbocharger WG (Wastegate) VGT (Variable Geometry Turbocharger) TST (Twin Stage Turbocharge)	Injection System M (Mechanical): ECR (Electronic Common Rail) EUI (Electronic Unit Injector)	Emission Standard EEV (Enhanced Environmentally friendly Vehicle)	Exhaust System EGR (Exhaust Gas Recirculation) SCR (Selective Catalytic Reduction)
-----------------------------------	---	---	--	---	---

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM



FPT INDUSTRIAL OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE

www.fptindustrial.com

