


SPECIFICATIONS

Thermodynamic Cycle	Diesel 4 stroke
Air Handling	TC
Arrangement	4L
Bore x Stroke (mm)	104 X 132
Total Displacement (l)	4.5
Valves per cylinder (n°)	2
Cooling System	liquid
Direction of Rotation (viewed facing flywheel)	CCW
Compression ratio	17.5:1
Injection System	M

PERFORMANCE

Rated power [*] (kW (HP) @ rpm)	66 (90) @ 2200
Peak torque (Nm (kgm) @ rpm)	400 (41) @ 1250
High idle speed (rpm)	2430
Low idle speed (rpm)	± 800


Minimum starting temperature without auxiliaries (°C)	-15 °
Oil and oil filter maintenance interval for replacement [***] (hours)	600

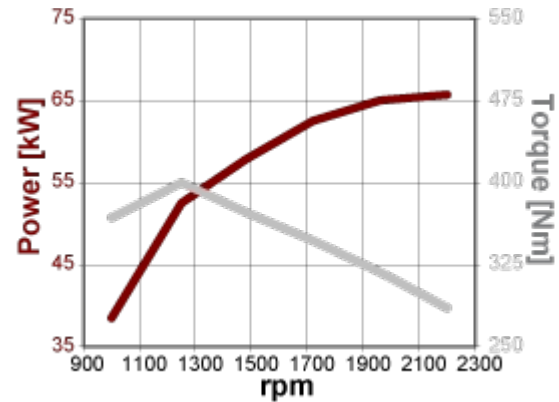

STANDARD CONFIGURATION

Flywheel housing (type)	SAE 3 - (wide / narrow) - cast iron
Flywheel size (inch)	11" 1/2
Intake manifold location	rearwards
Exhaust manifold location	middle high / right side / frontwards
Turbocharger	fixed geometry
Turbocharger location	middle / right side
Fan transmission ratio	1.4:1
Distance between fan - crankshaft centers (mm)	X = 0 Y = 296
Fuel filter (n°)	single cartridge - left side
Fuel prefilter	optional
Fuel Pump	mechanical rotary pump
Oil filter (n°)	single cartridge - right side
Oil sump	suspended sheet steel / front sump, 35° angularity limits continuous in all directions
Oil vapours blow-by circuit	timing cover
Oil heat exchanger	incorporated into the block
Oil filler	on valve cover
Lift pump	-
Starter	12 V - 3 kW
Alternator	12 V - 90 A with W contact
Engine stop device	incorporated in the pump
Wiring harness	-
Painting color	grey

WEIGHT AND DIMENSIONS

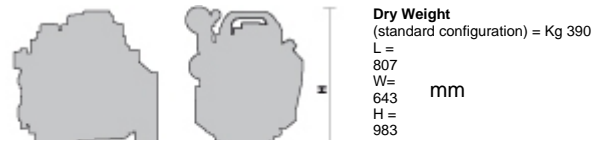

NOT INCLUDED IN STANDARD CONFIGURATION

Power Take Off (PTO)	-
PTO - transmission ratio	1.03:1
PTO - maximum available torque	SAE A 100 Nm (9 teeth) - 150 Nm (11 teeth) SAE B 240 Nm (13 teeth)
Battery - minimum capacity recommended [*] (Ah)	180 Ah (12 V)
Battery - minimum cold cranking capacity recommended [*] (A)	950 A (12 V)

[*] Power at flywheel according to 2004/26 EC (without fan), after 50 hours running, 3% tolerance, fuel Diesel EN 590.
[**] Oil type: ACEA E3 - E5.

Legend

Arrangement	Air Handling	Turbocharger	Injection System	Emission Standard	Exhaust System
L (in line)	TAA (Turbocharged with aftercooler) TC (Turbocharged) NA (Naturally Aspirated)	WG (Wastegate) VGT (Variable Geometry Turbocharger) TST (Twin Stage Turbocharge)	M (Mechanical): ECR (Electronic Common Rail) EUI (Electronic Unit Injector)	EEV (Enhanced Environmentally friendly Vehicle)	EGR (Exhaust Gas Recirculation) SCR (Selective Catalytic Reduction)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM



FPT INDUSTRIAL OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE

www.fptindustrial.com

