

OFF ROAD

Power Units

CURSOR 9

CURSOR 9

308 kW (419 HP) @ 2100 rpm
Stage V - Tier 4 Final

SPECIFICATIONS



No. of cylinders / valves	6L / 4	
Injection System	COMMON RAIL 1800 bar	
Turbocharger	WG	
Displacement	liters	8.7
Bore x Stroke	millimeters	117 x 135
Rated power	kW (HP) @ rpm	308 (419) @ 2100
Max Torque	Nm @ rpm	1800 @ 1500
ATS	HI-eSCR2	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	2270 x 1070 x 1582
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

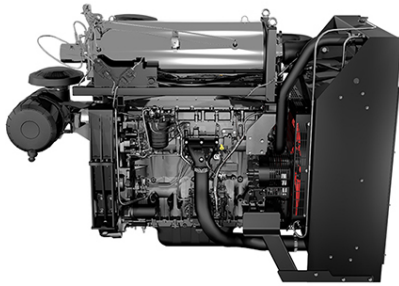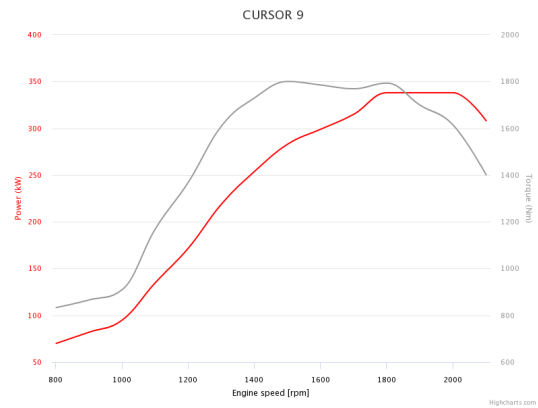

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

