

**SPECIFICATIONS**


No. of cylinders / valves	4L/2	
Injection System	COMMON RAIL 1600 bar	
Turbocharger	WG (TCA)	
Displacement	liters	2.8
Bore x Stroke	millimeters	91 x 108
Max power	kW (HP) @ rpm	55 (74) @ 2500
Max Torque	Nm @ rpm	260 @ 1800
ATS	DOC (Tier4F) / DOC - DPF (Stage V)	
Certification	Stage V - Tier 4 Final	

**WEIGHT AND DIMENSIONS**

Dimensions (L x W x H)	mm	1144 x 729 x 980
Dry Weight	Kg	290

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

**POWER & TORQUE**

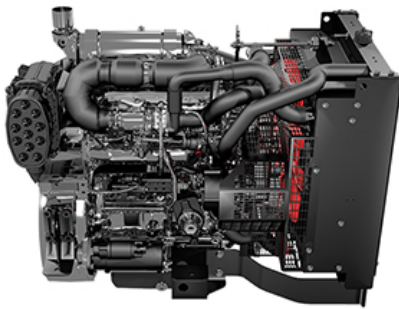

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

**POWER UNITS**

Do you want to know more?



LEGEND

**Air Handling**

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

**Turbocharger**

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

**Exhaust System**

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

