



F36ETVP03.A94

G-DRIVE STAGE V



Brochure main description		@1500rpm	@1800rpm
Application & simbol		Power Generation	
Engine identification main		F36	
Engine identification rating	kW	94	105
Engine features		PG G-Drive	
Emission feature		Tier4B_StageV	
Main characteristics		@1500rpm	@1800rpm
Emission certification		Tier4B_StageV	
Commercial code (for order)		F36ETVP03.A94	
Other Commercial code		F5MGL415A	
Technical code (original plant engine code, on engine block)		F5MGL415A*V001	
Technical homologation code		F5MGL415A*V	
Stand-by power (gross) [mech]	kW	94	105
Specific power	kW/l	26,2	29,2
Electric commercial power (estimation alternator power output)	kWe [kVA]	80 [100] (generator eff. 0,92)	92 [115] (generator eff. 0,92)
BMEP	bar	20,9	19,5
Oil consumption on mission (average)	% fuel consumption	0,25	
Cycle		diesel - 4 stroke	
Air charging system pattern		Turbocharged aftercooled	
Number of cylinder		4	
Configuration (cylinder arrangement)		in line	
Bore	mm	102	
Stroke	mm	110	
Stroke / Bore		1,07	
Displacement	l	3,6	
Unit Displacement	l	0,90	
Bore pitch	mm	110	
Valves per cylinder		4	
Cooling system type		liquid	
Direction of rotation (looking flywheel)		anti-clockwise	
Compression ratio		18,5 : 1	
Firing order		1 - 3 - 4 - 2	
Injection type		direct - electronic common rail	
Engine brake configuration		-	
Be10		8000 h	
Cylinder Head		N/A	
Single / Multiple		single	
Material		cast iron	
Head air circulation		reverse-flow	
Intake valve dia.	mm	32,5	
Exhaust valve dia.	mm	32,5	
Camshaft		N/A	
Layout		OHV	
Cam carrier		on cylinder block	
Material and Heat treatment		C53 bon - hardness 55 hrc on cammes	
Valve train		OHV valve train with valve pushrod and lower camshaft	



F36ETVP03.A94

G-DRIVE STAGE V



Main characteristics		@1500rpm	@1800rpm
Drivetrain (timing system)			gear tappet
Valve actuation			tappet & push rod
Variable valve actuation system			no
Cylinder block (crankcase)			No Structural
Material of cylinder block			cast iron
Type of liners			parent metall cylinder block
Liners replaceable; (slip fit or interference fit)			no
Bearing caps			machined cast iron
Crankcase Ventilation			closed
Oil separator			centrifugal
Crankshaft & counterweights			N/A
Material			GH 90-52-05 AS 15-2218
Acceptable Inertia (clutch)	kgm ²		0,8
Balancing			no
Turbocharger & EGR system			N/A
Turbocharger type			fixed geometry with wastegate valve
Turbocharger supplier			BorgWarner
Turbocharger control			WG pneumatic control
Pressure after turbocharger compressor	mbar		2600
Max turbine inlet temperature	°C		740 cont. / 760 peak
Temperature after turbocharger compressor	°C		N/A
Method of cooling the turbocharger			oil lubricated
Turbo protection devices			wastegate and ECU derating
EGR type			yes
EGR control strategy			external cooled EGR
EGR recirculation rate			-
Valve			Ø 21
Cooler			water cooler
Control			from engine ECU
Air mass measurement			no
Exhaust flap			N/A
Exhaust flap supplier			-
Actuation type			-
Exhaust flap cooling			-
Switchability (1500-1800 rpm)			N/A
Emission level 1500 rpm			StageV
Emission level 1800 rpm			Tier4B
Front power take off			N/A
PTO type			-
Max torque available from front of crankshaft (no side load)	Nm		-
Power take off on gear train			N/A
SAE A 9 teeth	Nm		-
SAE A 11 teeth	Nm		-
SAE B 13 teeth	Nm		-
SAE B (DIN 5482)	Nm		-
SAE 2B 15 teeth(ANSI B92,1)	Nm		-
References values			N/A
Engine dimension LxWxH (indicative values)	mm		783 x 689 x 846



F36ETVP03.A94

G-DRIVE STAGE V



Main characteristics		@1500rpm	@1800rpm
G-Drive Dimension LxWxH (indicative values)	mm	1111x689x1050	
Max permissible engine inclination	deg	35	
Engine Weight - Dry (no fluids, value purely indicative)	kg	330	
Engine Weight - Wet (with fluids, value purely indicative)	kg	365	
G-Drive Weight - Dry (no fluids, value purely indicative)	kg	450	
G-Drive Weight - Wet (with fluids, value purely indicative)	kg	470	
Center of gravity (FFOB or RFOB according to picture, standard engine layout)	mm	x = - 8 ; y = 140 ; z = 190	
Principal moment of inertia (reference on center of gravity ,standard engine layout)	kgm ²	I1 = 14 kgm ² ; I2 = 23 kgm ² ; I3 = 27 kgm ²	
Principal moment of inertia (reference matrix based on center of gravity,standard engine layout)	kgm ²	N/A	
Center of gravity (FFOB or RFOB according to picture, standard IPU/G-Drive layout)	mm	x = 6 ; y = 168; z = - 281	
Principal moment of inertia (reference on center of gravity ,standard IPU/G-Drive layout)	kgm ²	I1 = 21 kgm ² ; I2 = 32 kgm ² ; I3 = 40	
Principal moment of inertia (reference matrix based on center of gravity,standard IPU/G-Drive layout)	kgm ²	N/A	
Mass moment of inertia - rotating components (excluding flywheel)	kgm ²	N/A	
Mass moment of inertia - standard flywheel	kgm ²	1,189	
Bending moment on the flywheel housing	Nm	N/A	
Flywheel housing SAE sizing		N/A	
Flywheel SAE sizing		N/A	
Bending moment on PTO	Nm	-	
Max static mounting surface load	N	N/A	
Crankshaft thrust bearing pressure limit		N/A	
Intermittent load:	MPa	N/A	
Continuous load:	MPa	N/A	
Rear main bearing load	MPa	N/A	
Max bending moment available from front of the crankshaft:		N/A	
0 deg	Nm	100	
90 deg	Nm	300	
180 deg	Nm	300	
Environmental operating conditions		N/A	
Max altitude for declared performances	m	1000	
Max ambient temperature for declared performances	°C	40	
Min guaranteed temperature for cold start w/o any aid (stand alone engine)	°C	- 15 (with glow plugs)	
Min guaranteed temperature for cold start with Air Heater (stand alone engine)	°C	- 23 (with glow plugs and fuel heater)	
Min guaranteed temperature for cold start with grid heater and block heater (stand alone engine)	°C	- 32 (with glow plugs, fuel heater and block heater)	
Time preheating for manifold heater	s	-	
Time post heating for manifold heater	s	-	
Low idle continuous operation time (reccomended)	h	N/A	
Engine performance [*]		N/A	
Continuous power (gross) [mech]	kW	75,2	84
Prime power (gross) [mech]	kW	94	105
Stand-by power (gross) [mech]	kW	94	105



F36ETVP03.A94

G-DRIVE STAGE V



Main characteristics		@1500rpm	@1800rpm
Fan consumption [mech]	kW	3,36	5,8
Continuous power (net) [mech]	kW	72,4	79,3
Prime power (net) [mech]	kW	90,6	99,2
Stand-by power (net) [mech]	kW	90,6	99,2
Typical generator output		92%	92%
Generator available power @ Prime power	kW	83,4 (generator eff. 0,92)	91,3 (generator eff. 0,92)
Generator available power @ Stand by	kW	83,4 (generator eff. 0,92)	91,3 (generator eff. 0,92)
Power limitation according to ambient conditions		N/A	
Ambient temperature above xx°C	%/5°C (xx°C)	2	
Altitude > 1000 < 3000m above sea level	%/500m	3	
Altitude > 3000m above sea level	%/500m	6	
Power limitation due to safety protections		N/A	
Pre-Warning: first advice of high coolant temperature[**]. Switch-on of the amber lamp	°C	104	
Warning: second advice of high coolant temperature[**]. Switch-on of the red lamp	°C	110	
Start of derating	°C	108	
Altitude level: gradual reduction of transient response by smoke map correction from	m	2000	
Fuel temperature	°C	70	
Intake manifold air temperature	°C	70	
ATS Max gas inlet temperature	°C	600	
Max allowed exhaust temperature	°C	740°C (760 peak)	
Turbine overheating protection	°C	N/A	
Turbine overspeed protection	rpm	N/A	
Oil temperature protection	°C	125	
Oil pressure protection (min engine rpm)	bar	N/A	
Fuel System			
Fuel density	kg/l	0,84	
Injection system type		electronic common rail	
Injection pump manufacturer		BOSCH	
Injection model type		common rail	
Injection model pump		CP4N1	
Injection pressure	bar	1600	
Injector		CRI 2-160HW	
Injector installation (sleeve, sealing flat or conical)		sealing flat	
Injector nozzle		8 x 350	
Engine fuel compatibility		See dedicated GOLD Book document on fluids	
Feed pump on engine		integrated in high pressure pump	
Max fuel flow supply line	l/h	N/A	
Nominal feed pressure	bar	1	
Fuel filter		single Cartridge on left side	
Fuel filter clogging sensor		no	
Max continuous allowable fuel temperature (without derating)	°C	70	
Max relative pressure at gear pump inlet	bar	N/A	
Min relative pressure at gear pump inlet	bar	N/A	
Max back flow relative pressure	bar	N/A	
Max back flow restriction	bar	N/A	



F36ETVP03.A94

G-DRIVE STAGE V



Fuel System

Max heat rejection to return fuel	kW	N/A	
Max fuel flow return line	kg/h	@1500: 20,1 kg/h	@1800: 22 kg/h
Min fuel tank venting requirement	m ³ /h	N/A	
Prefilter / Water separator micron size	µm	>99% @30	

Air Intake System

		@1500rpm	@1800rpm
Aftercooling system type		air to air	
Interstage cooling type		-	
RoA (Temperature raise between ambient and inlet to engine)	°C	10	
Filter air intake temperature (warm air ricirculatuion)	°C	40	
Max intake manifold temperature	°C	50	
Compressor inlet pressure (with new air filter)	hPa	≥ - 50	
Compressor inlet pressure (with dirty air filter)	hPa	≥ - 65	
Air filter type		cartridge	
Loads on turbocharger on compressor intake	kg	0	
Loads on turbocharger on compressor outlet	kg	0	
Charge air flow (max)	kg/h	382	425

Exhaust System

		@1500rpm	@1800rpm
Max back pressure (after exhaust flap) @ rated power with clean system	hPa	220	
Max mechanical load on turbine flange	kg	0	
Max ambient temperature for exhaust flap actuator	°C	-	
Max exhaust temperature After Treatment System	°C	740 cont. / 760 peak	
Max exhaust flow rate	kg/h	401 (1500 rpm) ; 446 (1800 rpm)	
Energy to exhaust	kW	73,5	64,7

After Treatment System

After Treatment System	DOC + DPF + SCR-T		
POC	not installed		
DPF	yes		
DOC	yes		
SCR	yes		
Urea Dosing System	yes		
AdBlue mixer	yes		
ATS sensors	DeltaP / 2x Temperature sensor Us/Ds DOC / 2x Temperature sensor Us/Ds SCRT / 2x Nox Sensor Us/Ds SCRT		
DPF regeneration strategy	active and passive		

Lubrication System

Oil sump capacity, max level	l	8
Oil sump capacity, min level	l	6,5
Oil system capacity including filter	l	9
Oil pump type		gear pump
Oil pump drive arrangement		driven by gear
Min oil pump flow	l/min	N/A
Max oil pump flow (@rated speed)	l/min	70
Min oil pressure @ low idle (engine oil temp at 120°C)	kPa (bar)	N/A



F36ETVP03.A94

G-DRIVE STAGE V



Lubrication System

Min oil pressure @ rated speed (engine oil temp at 120°C)	kPa (bar)	N/A
Max oil pressure @ rated speed (engine oil temp at 120°C)	kPa (bar)	N/A
Max oil temperature @ full load (in main gallery)	°C	125
Max oil pressure peak on cold engine	bar	N/A
Oil cooler type		water cooler
Transducer for indicating oil temperature and pressure		signal from ECU
Max engine angularity - longitudinal / transversal (std oil pan)	deg	35
Allowed engine gradability during installation on vehicle	deg	± 4
Oil servicing intervals	h	600
Oil filter type		spin-on cartridge
Oil filter capacity	l	0,5
Max oil content admitted in blow by gas (after filter)	g/h	< 0,5
Oil for cold condition mission (T° ambient < -25°C)		see dedicated GOLD Book document on fluids

Cooling system

		@1500rpm	@1800rpm
Type (water to water or air to water)		air to water	
Recommended coolant		50% water and 50% coolant (depending on mission)	
Min radiator cap pressure	kPa	100	
Warnnig setting first threshold	°C	106	
Max additional restriction (cooling system)	Pa	N/A	
Air to boil (prime power, open genset configuration). For further information see GB document	°C	55°C @1500rpm ; 53°C @1800rpm	
Air flow (prime power, open genset configuration)	m³/s	N/A	
Air to boil (stand by, open genset configuration). For further information see GB document	°C	N/A	
Air flow (stand by, open genset configuration)	m³/s	N/A	
EGR Cooler water flow (for ΔT=6°C)	l/s	N/A	
LP-CAC water flow (for ΔT=6°C)	l/s	N/A	
Fan		N/A	
Diameter	mm	550	
Number of blades		10	
Drive ratio		1,3	
Speed		@1500rpm:1950rpm ; @1800rpm:2340rpm	
Air flow		@1500rpm: 2,5 m3/s ; @1800rpm: 3 m3/s	
Power consumption		@1500rpm:3,36kW ; @1800rpm: 5,8kW	
Radiator		N/A	
Core dimensions LxWxh	mm	625 x 267,5 x 840	
Dry weight	kg	44,5	
Radiator coolant capacity	l	5,5	
Optimum coolant temperature range @engine out (50% glycol)	°C	N/A	
Engine Water pump Type		centrifugal pump	
Engine water pump drive		driven by belt	
Coolant capacity (engine only)	l	5	
Coolant capacity (radiator & hoses)	l	7	
Thermostat type		wax type	
Thermostat position		on cylinder head	
Thermostat opening / fully open temperature	°C	79 ± 2 / 94 ± 2	



F36ETVP03.A94

G-DRIVE STAGE V



Cooling system		@1500rpm	@1800rpm
Recommended coolant circuit pressurization range (relative)	hPa		N/A
Coolant engine pressure outlet – inlet (delta pressure, open thermostat, high idle conditions)	hPa	@1500rpm:132,8 hPa ; @1800rpm:182,4	
Coolant engine pressure outlet – inlet (only with remote thermostat, ex. retarder)	hPa		-
Min coolant pressure (no pressure cap and thermostat closed)	hPa		-
Coolant water pump inlet pressure (water temperature 60-100°C)	hPa		N/A
Coolant flow to radiator @rated speed	l/h		N/A
Min coolant expansion space (% total cooling system capacity)	%		N/A
Max coolant flow to accessories @ rated speed from cab heater	l/min		N/A
Engine out coolant to ambient @rated speed	delta °C		61,6
Engine out coolant to ambient @torque speed	delta °C		N/A
Charge air cooler outlet to ambient @max rpm - CAC dT	delta °C		N/A
Pump water flow	l/min	105	134

Electrical, Electronic and Control Systems

System voltage	V	12
Engine control unit		Bosch MD1 CS069
ECU software		P1738_MD1CS069_522.a2l
ECU Vehicle connection		with CAN line
ECU operating range	°C	- 40 + + 125
Temperature of ECU case for <5' after power up	°C	85
ECU rated continuous temperature	°C	80
ECU communication protocol		SAE J1939
Min power supply for ECU operation	V	10
Max power supply for ECU operation	V	16
Battery wire connection resistance value @20°C (from battery to ECU)	mΩ	≤ 70
Diagnostic connector type		ISO 14229
Min cranking speed TDC @-30°C	rpm	70
Average cranking speed	rpm	110
N° tooth pinion/crown gear		10 / 126
Min battery voltage	V	N/A
Mean battery voltage	V	N/A
Min battery current	Ah	TBC
Mean battery current	Ah	101
Max starting circuit resistance (to starter)	mΩ	< 70

Cold starting

Without air preheating	°C	- 15
With air preheating (if available)	°C	-

Emission gaseus and particulales

NOx (Oxides of nitrogen) [NRSC]	g/kWh	see homologation certificate
HC (Hydrocarbons) [NRSC]	g/kWh	see homologation certificate
NOX+HC [NRSC]	g/kWh	see homologation certificate
CO (Carbon monoxide) [NRSC]	g/kWh	see homologation certificate



F36ETVP03.A94

G-DRIVE STAGE V



Emission gaseus and particulales

PM (Particlutes) [NRSC]	g/kWh	see homologation certificate
CO2 (Carbon Dioxide) [NRSC]	g/kWh	see homologation certificate
NOx (Oxides of nitrogen) [NRTC]	g/kWh	see homologation certificate
HC (Hydrocarbons) [NRTC]	g/kWh	see homologation certificate
NOX+HC [NRTC]	g/kWh	see homologation certificate
CO (Carbon monoxide) [NRTC]	g/kWh	see homologation certificate
PM (Particlutes) [NRTC]	g/kWh	see homologation certificate
CO2 (Carbon Dioxide) [NRTC]	g/kWh	see homologation certificate

Maintenance

Oil drain interval		600h
Oil filter change		600 h
Oil refilling time		daily check to evaluate oil refill necessity
Approved engine oil specifications		N/A
CCV filter change		1800 h
Fuel filter change		600 h
Fuel pre-filter change		600 h
Belt replacement		3000 h
Valve lash check /adjustment		for life
AdBlue filter Change		see dedicated GOLD Book document on fluids
DPF filter service		600 h
Coolant change		3000 h

Engine Noise

Overall sound pressure (engine only)	dBA	92,5
Overall sound pressure (with accessories only)	dBA	N/A
Exahust noise (w/o Muffler)	dBA	N/A
Noise spectrum (octave analysis performed at the position of maximum noise) - diagram	Table dB-Hz	N/A
A-weight sound power level LW function of power (value calculated respecting standard ISO 3744 and 3746. For further information see GB document)		N/A
0% (no load)	dBA	N/A
75% (partial load)	dBA	N/A
100% (full load)	dBA	N/A
110% (overload)	dBA	N/A

Step Load (for further information see GB document)

		@1500rpm	@1800rpm
G1 (% of PrP)	%	N/A	70
G2 (% of PrP)	%	55	60
G3 (% of PrP)	%	45	51
G1 (% of PrP) [open flap]	%	-	-
G2 (% of PrP)[open flap]	%	-	-
G3 (% of PrP)[open flap]	%	-	-
G1 (% of PrP) [closed flap]	%	-	-
G2 (% of PrP) [closed flap]	%	-	-
G3 (% of PrP) [closed flap]	%	-	-
Removal load (G1)	%	N/A	N/A
Removal load (G2)	%	N/A	N/A
Removal load (G3)	%	N/A	N/A



F36ETVP03.A94

G-DRIVE STAGE V



Step Load (for further information see GB document)		@1500rpm	@1800rpm
Emergency (xxx)	%	N/A	N/A
Emergency (xxx)	%	N/A	N/A
Emergency (xxx)	%	N/A	N/A

Maximum Rating Performance Data		@1500rpm	@1800rpm
Torque	Nm	609	557
Ambient Temperature	°C	25	25
EGR Rate	%	<10	<10
Fuel Flow	g/s	5,6	6,1
Fuel consumption (BSFC) (prime power)	(kg/h) [g/kWh]	[210]	[210]
Fuel consumption (BSFC) (stand by)	(kg/h) [g/kWh]	[209]	[210]
Fuel consumption (BSFC) (80% prime power)	(kg/h) [g/kWh]	[205]	[204]
Fuel consumption (BSFC) (50% prime power)	(kg/h) [g/kWh]	[206]	[209]
Fuel consumption (BSFC) (25% prime power)	(kg/h) [g/kWh]	[234]	[243]
AdBlue consumption (prime power)	% of fuel cons	4,3	4,2
AdBlue consumption (stand by)	% of fuel cons	3,5	3,6
AdBlue consumption (80% prime power)	% of fuel cons	4,5	4,7
AdBlue consumption (50% prime power)	% of fuel cons	6,1	5
AdBlue consumption (25% prime power)	% of fuel cons	4	3
Exhaust Gas Flow	kg/h	401	446

Design air handling system data		@1500rpm	@1800rpm
EGR flow	kg/h	58,5	55,7
EGR pressure	kPa	287	296,7
Boost pressure (compressor outlet)	kPa	278,5	265
Pressure drop on charge air cooling system	kPa	7,4	6,3
Max temperature after HP-Compressor	°C	N/A	N/A
Boost temperature (includes EGR effect)	°C	170	161,2
ATS back pressure	kPa	117	121,3
Exhaust Gas Temp between HP-TC	°C	N/A	N/A
Max Exhaust Gas Temp (after TC)	°C	507,6	517,6
Max admitted back pressure after SCR	kPa	N/A	N/A
Max admitted back pressure after TC	kPa	117	121,3
Power engine coolant without EGR & CAC (prime power)	kW [kcal/kWh]	N/A	N/A
Power engine coolant without EGR & CAC (stand by)	kW [kcal/kWh]	N/A	N/A
Power high Temperature EGR Cooler (engine water) (prime power)	kW [kcal/kWh]	N/A	N/A
Power high Temperature EGR Cooler (engine water) (stand by)	kW [kcal/kWh]	N/A	N/A
Power to coolant due to EGR LP-Circuit (prime power)	kW [kcal/kWh]	N/A	N/A
Power to coolant due to EGR LP-Circuit (stand by)	kW [kcal/kWh]	N/A	N/A
Total Power to coolant (prime power)	kW [kcal/kWh]	56	58,5
Total Power to coolant (stand by)	kW [kcal/kWh]	56	58,5
Total pump water flow	l/s	1,75	2,06
Radiator Coolant Flow (5% less if continuous deaerating system, coolant according to FPT norms)	l/min	N/A	N/A
EGR Cooler water flow (for ΔT=6°C)	l/s	N/A	N/A
LP-CAC water flow (for ΔT=6°C)	l/s	N/A	N/A
Power in CAC (air to air) (prime power)	kW [kcal/kWh]	13,1	13,9




F36ETVP03.A94

G-DRIVE STAGE V




Design air handling system data		@1500rpm	@1800rpm
Power in CAC (air to air) (stand by power)	kW [kcal/kWh]	14,4	15,3
Power Radiated	kW	13	13,4
Charge Air Flow	g/s	104,7	116,8
[*] Power at flywheel according dir. 97/68 EC (w/o fan), after 50 hours of run-in, tolerance $\pm 5\%$, fuel EN 590; Test according ISO 3046/1, turbo air inlet temperature 25°C, atmospheric pressure 100 kPa, humidity 30 %		N/A	
[**] according to temperature sensor tolerance		N/A	

Images

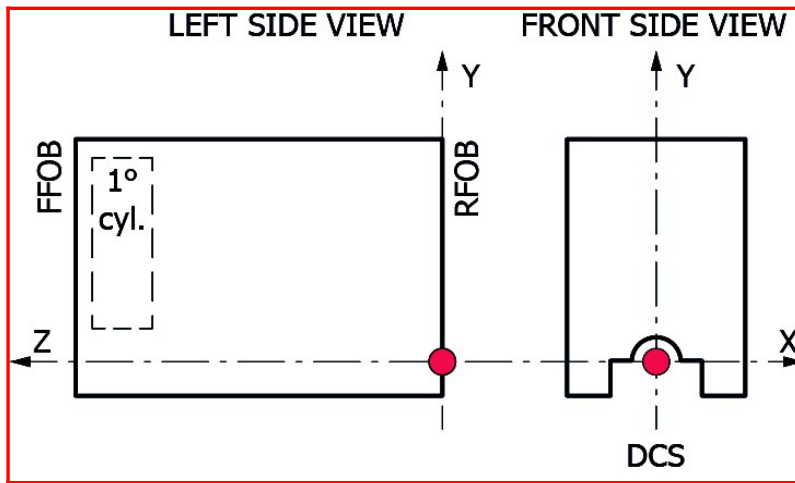


Principal Moment of Inertia

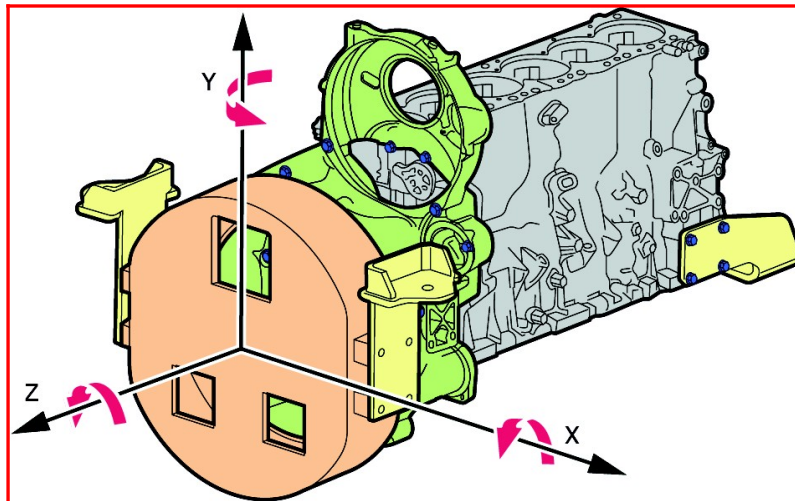


Components



F36ETVP03.A94
G-DRIVE STAGE V

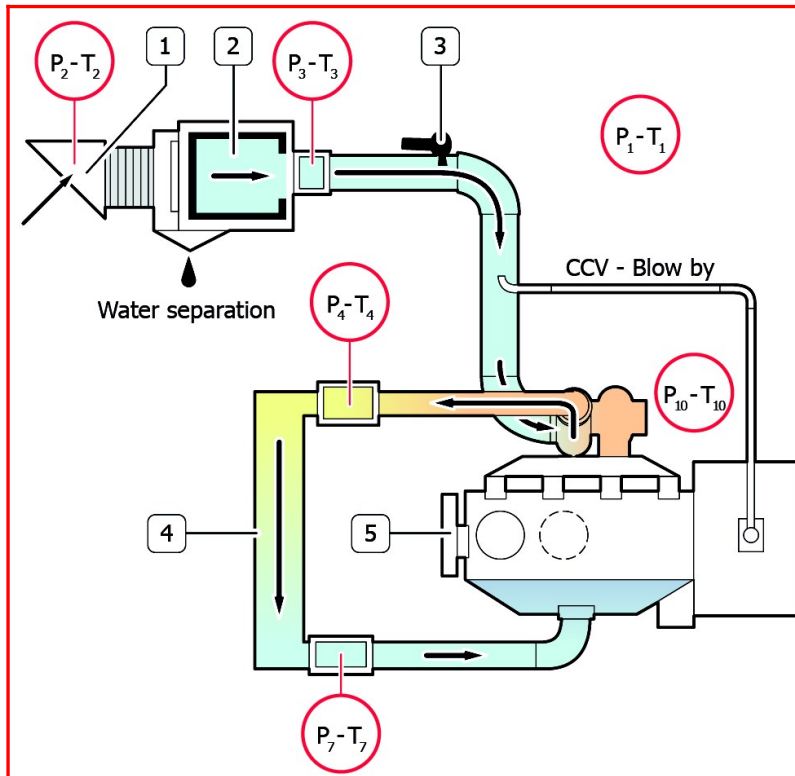

1.Snorkel 2.Air Filter 3.Humidity sensor 4.Intercooler

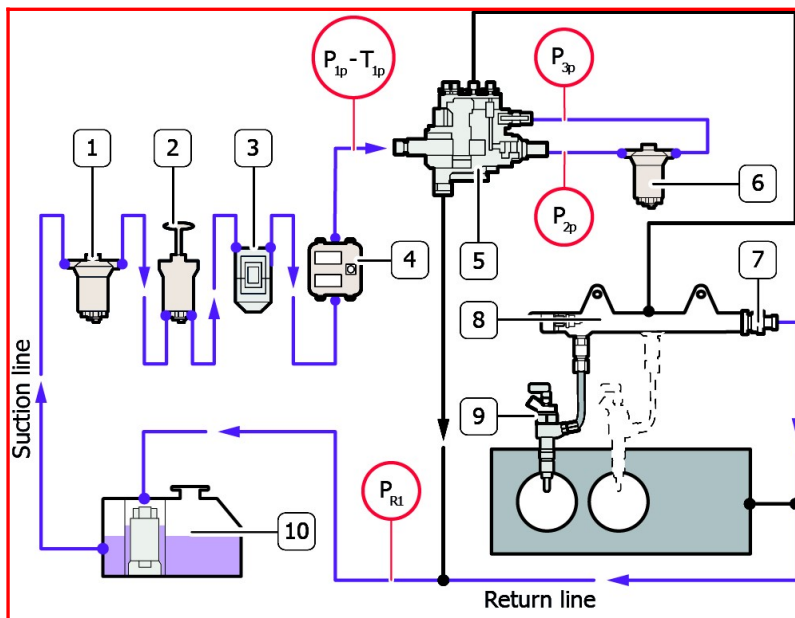


1.Inspection glass with strainer 2.Prime pump 3.Pre-filter with water separator 4.ECU 5.High Pressure pump 6.Fuel Filter 7.Overpressure valve 8.Common Rail 9.Injectors 10.Fuel tank



F36ETVP03.A94

G-DRIVE STAGE V

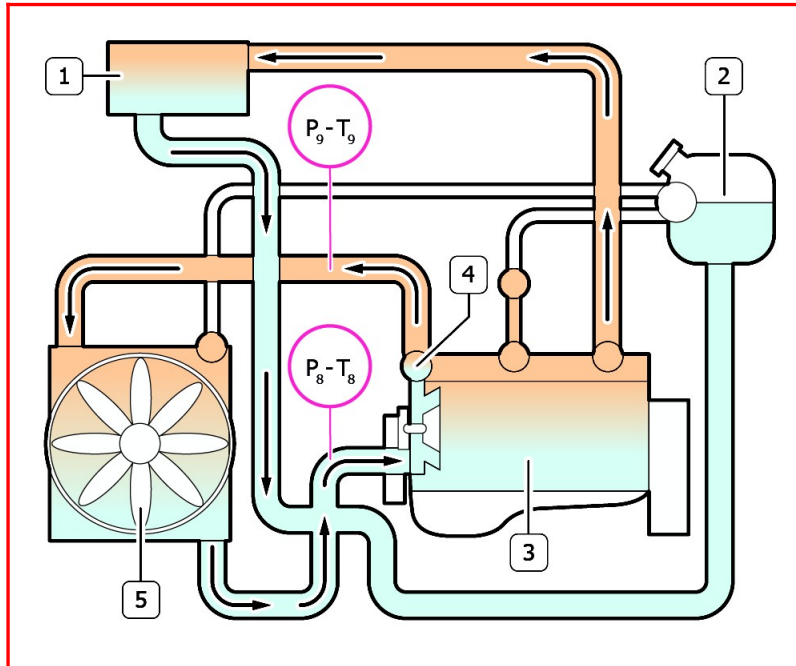

1.Heating element 2.Expansion tank 3.Engine 4.Thermostat 5.Radiator



F36ETVP03.A94

G-DRIVE STAGE V



ACRONYMS LIST

Acronyms	Description
-	Not Needed
2stTC	Two Stage Turbo (sequential)
Ag	Agricultural
ASC	Ammonia Slip Catalyst (same as CUC)
ATS	After Treatment System
BSFC	Brake Specific Fuel Consumption
CAC	Charge Air Cooler
CCDPF	Close Coupled DPF
CCV	Crankcase Ventilation
CE	Construction Equipment
CI	Cast Iron
CRS	Common Rail System
CRSN	Common Rail System NKW (Commercial vehicles)
CUC	Clean Up Catalyst for ammonia (same as ASC)
DAVNT	Dual Axis Variable Nozzle Turbine
DCS	Drawing Coordinate System
DI	Direct Injection
DOC	Diesel Oxidation Catalyst
DOHC	Double Over Head Camshaft
DPF	Diesel Particulate Filter
ECEGR	External Cooled EGR
ECU	Engine Control Unit
EEGR	External EGR
EGR	Exhaust Gas Recirculation
epWG	Electro pneumatic WG
eVGT	Electrical VGT
eWG	Electrical WG
FFOB	Front Face of Block
FGT	Fixed Geometry Turbocharger (no WG)
FIE	Fuel Injection System
HD	Heavy Duty
HLA	Hydraulic Lash Adjusters
IDI	Indirect Injection

Acronyms	Description
IEGR	Internal EGR
IPU	Industrial Power Unit
ISC	Interstage Cooling
LD	Light Duty
LDCV	Light Duty Commercial Vehicles
LH	Left Hand Side
LWR	Laser Welded Rail
MD	Medium Duty
n/a	Not Available
NA	Natural Aspirated
NS	Non Structural
OHV	Over Head Valves
OPT	Option
PCP	Peak Cylinder Pressure
PTO	Power Take Off
RFOB	Rear Face of Block
RH	Right Hand Side
S	Structural
SAPS	Sulphated Ash, Phosphorus, Sulphur
SCR	Selective Catalytic Reduction catalyst
SCRoF	SCR on filter
SOHC	Single Over Head Camshaft
STD	Standard
TC	Turbocharged
TCA	Turbocharged, Charge Air Cooled
THM	Thermal Management
UFDPF	Under Floor DPF
UQS	Urea Quality Sensor
VE	Bosch Distributor Mechanical Pump
VFT	Variable Flow Turbine
VGT	Variable Geometry Turbocharger
WG	Waste Gate Turbocharger
XPI	Extra high Pressure Injection (Scania, Cummins)

Unit of misure according to international system of unit. Engine accessories and Options available on Option List. All data is subject to change without notice.

UPDATING

Revision	Description	Date
Revision 1.6_Jul 2021		July/2021
Revision 2.0_May 2022		June/2022
Revision 2.1_Jul 2022		July/2022
Revision 2.2_Sep 2022		October/2022



F36ETVP03.A94

G-DRIVE STAGE V



Revision 3.0_Mar 2023	March/2023
Revision 3.1_Apr 2023	April/2023
Revision 3.2_Jun 2023	June/2023