


SPECIFICATIONS

No. of cylinders / valves	4/4	
Injection System	COMMON RAIL 1600 bar	
Turbocharger	WG (TCA)	
Displacement	liters	4.5
Bore x Stroke	millimeters	104 x 132
Max power	kW (HP) @ rpm	125 (170) @ 2200
Max Torque	Nm @ rpm	712 @ 1500
ATS	HI-eSCR2	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1409 x 810 x 1215
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

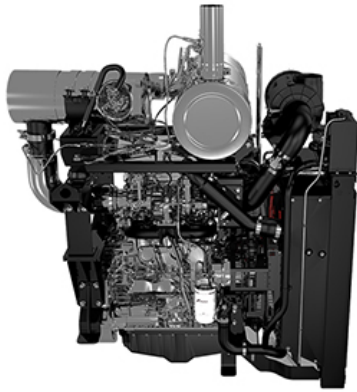

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

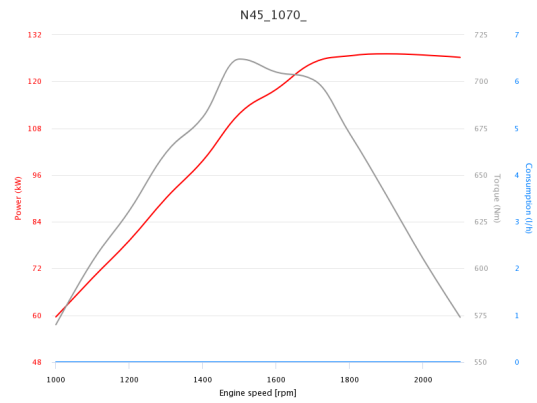

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

