

Model: PDT408A2 - 1022 kVA PERKINS Industrial Series



50 HZ	50 Hz		Cooling System: Water
T	Three Phase		Diesel



Foto Indicativa / Indicative Picture

■ Features

Generating Set Model	PDT408A2
Power in PRP (kVA)	1022
Power in LTP (kVA)	1125
Engine Model	4008TAG2A
Engine Brand	PERKINS
Alimentation	Diesel
Cooling System	Water
Displacement (cc)	30561
Fuel Tank Capacity(lt)	120.00
Battery Capacity	2x225
Automatic Control Panel	A4
Manual Control Panel	QMA3
Sound Proof Canopy	CS10
Frequence	50 Hz
Voltage	400/230 V + N
Rounds per Minute	1500

■ Standards Applied

Coelmo Generating Sets are CE marked and comply with the following regulations:
(Environmental conditions 1.000 mbar, 25C° , 30% relative humidity. Power referring to ISO 3046)

- Power: ISO 8528
- Directive Machinery : 2006/42/CE - 89/392CEE - 98/37/CE
- Low Voltage : 2006/95/CE - 73/23/CEE - 93/68/CEE
- Electromagnetic Compatibility : 2004/108/CE - 89/336/CEE - 93/68/CEE
- Emissions for non-road engines : 2002/88/CE - 97/68/CE (*)
- Acoustic emission : 2005/88/CE - 2000/14/CE (**)

* For non-stationary use only

** For Sound Proof Version Only

■ Basic Configuration

- Fuel tank
- Starting battery
- High temperature engine thermostat
- Low pressure oil thrust meter
- Electrovalve engine
- Initial filling of fluids

■ Documentation

- User's and maintenance handbook
- Electric schemes
- CE declaration
- Test report (on demand)

■ Available Options

- 3 or 4 poles circuit breaker
- Relay and/or differential module
- Over sized integrated fuel tank
- Engine temperature sensor
- Oil pressure sensor
- Fuel level indicator float
- Automatic refill system
- Sound proof canopy
- Catalytic muffler
- Silenced muffler
- Electro manual control panel
- Automatic control panel
- Change over mains/generating set
- Slow speed trailer
- High speed trailer
- Remote alarm control board
- Commissioning

Model: PDT408A2 - 1022 kVA PERKINS Industrial Series

■ Engine

Diesel engine, four stroke water cooled. An efficient cooling system assures excellent performances in whichever site conditions. A low electric power/displacement ratio guarantees a full available power.

Model	4008TAG2A
Brand	PERKINS
Alimentation	Diesel
Number of Cylinders	8
Displacement (cc)	30561
HP at 50Hz	1205
Speed Governor	Electronic
Aspiration	TC
Air Flow Ventilator (m3/h)	81000
Combustion Air Flow (m3/h)	4500
Exhaust Gas Flow (m3/h)	12000
Maximum Exhaust Gas Temperature (°C)	438
Bore (mm)	160
Stroke (mm)	190
Oil cap (l)	153.00
Rounds Per Minute	1500
Consumption at 2/4 of the load (l/h)	108.00
Consumption at 3/4 of the load (l/h)	160.00
Consumption at 4/4 of load (l/h)	220.00

■ Aspiration Type


NA	=	Natural Aspiration
TC	=	Turbo Compressor
TCA/A	=	Turbo Compressor Air/Air
W/A	=	Turbo Compressor Water/Air

■ Alternator

Manufactured in accordance with international IEC 34-1 standards, self regulated, selfexcited, selfventilated, insulated in class "H", regulation accuracy (with load from 0 to 100%) of +/- 1%.

Number of Poles	4
Excitation	Brushless with electronic regulator
Number of Terminals	12
IP	23
Phase	Three Phase
Cos Phi	0.8
Performance	0.96
Voltage	400/230 V + N

■ Dimensions

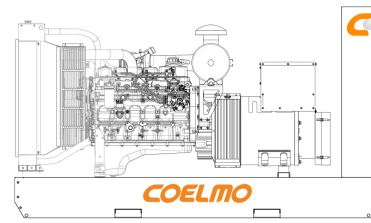

Disegno a scopo illustrativo / Drawing for illustrative purpose

Version	Open	Soundproof
Length (mm)	5000	6000
Width (mm)	2000	2200
Height (mm)	2350	2903
Weight (kg)	7503	9911