

Model: PDT416A2 - 2058 kVA PERKINS Industrial Series

50
HZ

50 Hz



Cooling System: Water

T

Three Phase



Diesel



Foto Indicativa / Indicative Picture

Features

Generating Set Model	PDT416A2
Power in PRP (kVA)	2058
Power in LTP (kVA)	2263
Engine Model	4016TAG2A
Engine Brand	PERKINS
Alimentation	Diesel
Cooling System	Water
Displacement (cc)	61123
Fuel Tank Capacity(lt)	120.00
Battery Capacity	4x225
Automatic Control Panel	A6
Manual Control Panel	QMA3
Sound Proof Canopy	CS13
Frequency	50 Hz
Voltage	400/230 V + N
Rounds per Minute	1500

Basic Configuration

- Fuel tank
- Starting battery
- High temperature engine thermostat
- Low pressure oil thrust meter
- Electrovalve engine
- Initial filling of fluids

Documentation

- User's and maintenance handbook
- Electric schemes
- CE declaration
- Test report (on demand)

Available Options

- 3 or 4 poles circuit breaker
- Relay and/or differential module
- Over sized integrated fuel tank
- Engine temperature sensor
- Oil pressure sensor
- Fuel level indicator float
- Automatic refill system
- Sound proof canopy
- Catalytic muffler
- Silenced muffler
- Electro manual control panel
- Automatic control panel
- Change over mains/generating set
- Slow speed trailer
- High speed trailer
- Remote alarm control board
- Commissioning

Standards Applied

Coelmo Generating Sets are CE marked and comply with the following regulations:
(Environmental conditions 1.000 mbar, 25C^o, 30% relative humidity. Power referring to ISO 3046)

- Power: ISO 8528
- Directive Machinery : 2006/42/CE - 89/392CEE - 98/37/CE
- Low Voltage : 2006/95/CE - 73/23/CEE - 93/68/CEE
- Electromagnetic Compatibility : 2004/108/CE - 89/336/CEE - 93/68/CEE
- Emissions for non-road engines : 2002/88/CE - 97/68/CE (*)
- Acoustic emission : 2005/88/CE - 2000/14/CE (**)

* For non-stationary use only

** For Sound Proof Version Only

Model: PDT416A2 - 2058 kVA PERKINS Industrial Series

■ Engine

Diesel engine, four stroke water cooled. An efficient cooling system assures excellent performances in whichever site conditions. A low electric power/displacement ratio guarantees a full available power.

Model	4016TAG2A
Brand	PERKINS
Alimentation	Diesel
Number of Cylinders	16
Displacement (cc)	61123
HP at 50Hz	2367
Speed Governor	Electronic
Aspiration	TC
Air Flow Ventilator (m3/h)	145800
Combustion Air Flow (m3/h)	8220
Exhaust Gas Flow (m3/h)	23220
Maximum Exhaust Gas Temperature (°C)	493
Bore (mm)	160
Stroke (mm)	190
Oil cap (l)	213.00
Rounds Per Minute	1500
Consumption at 2/4 of the load (l/h)	210.00
Consumption at 3/4 of the load (l/h)	316.00
Consumption at 4/4 of load (l/h)	434.00

■ Aspiration Type


NA	=	Natural Aspiration
TC	=	Turbo Compressor
TCA/A	=	Turbo Compressor Air/Air
W/A	=	Turbo Compressor Water/Air

■ Alternator

Manufactured in accordance with international IEC 34-1 standards, self regulated, selfexcited, selfventilated, insulated in class "H", regulation accuracy (with load from 0 to 100%) of +/- 1%.

Number of Poles	4
Excitation	Brushless with electronic regulator
Number of Terminals	12
IP	23
Phase	Three Phase
Cos Phi	0.8
Performance	0.97
Voltage	400/230 V + N

■ Dimensions

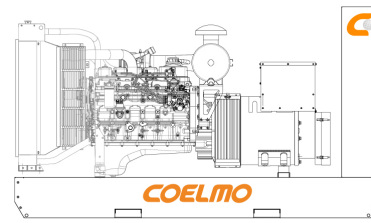

Disegno a scopo illustrativo / Drawing for illustrative purpose

Version	Open	Soundproof
Length (mm)	8000	10000
Width (mm)	2400	2400
Height (mm)	2900	3403
Weight (kg)	10804	13900